






**Scot**   
**CHEMICALS**  
SPECIALTY COATINGS

 0414-2297251

 [www.wallproindia.in](http://www.wallproindia.in)

 9829022556

 [scotchemical@gmail.com](mailto:scotchemical@gmail.com)





**Monika Bhansali**  
**Director**

## ABOUT US

We, SCOT Chemicals are a technologically sound construction chemical manufacturing organization, dedicatedly meeting the market requirements, since our formation in the year 2010. Our company is famous in the market as as ISO 9001:2008 certified manufacturer, supplier and exporter of Construction Chemicals, Acrylic Polymer Cement Based, Tiles and Stone Adhesive, Joint Filler, Wall putty, Primer, Interior and Exterior Paint Range, Mastic, Epoxy, Grouts, Waterproofing and Heat Insulation coating, sealants and adhesives are widely praised by clients for their balanced composition, longer shelf life and resistance against all the weather condition.

By giving high attention towards faith and gratification of customers, we are attaining immense growth in the today's cut-throat competition. Each member of our team is honest, punctual, dedicated and capable of accomplishing even the most challenging targets with perfection and on time. Further our R&D personnel keep themselves abreast with the technological development and market dynamics, which help them in making & offering the best to clients. We have advance skills which adds to the performance of SCOT construction chemical, Tile and Stone Adhesive, Wall putty, Primer, Interior and Exterior paint range, Mastic, Epoxy and other products. With the support of our existing clients and advent-garde range, we aim to increase our clientele, especially in all region of India.

Our primary goal is to satisfy our customers, putting a strong emphasis on the quality of our services. Our quality Management system is certified by the ISO 9001:2008 We are also the holders of relevant certificates in the field of Management system.

To consistently fulfil our vision - **Intends to set an example in the field of construction chemicals by investing heavily in R&D leading to a sustainable future and serve the various stakeholders with honesty and generosity** - We continue to develop and offer further above - standard solution and procedures for our customers.


We are glad that SCOT Chemical can provide you with increasingly better services.

Yours sincerely,

Monika Bhansali

Director

Thanks

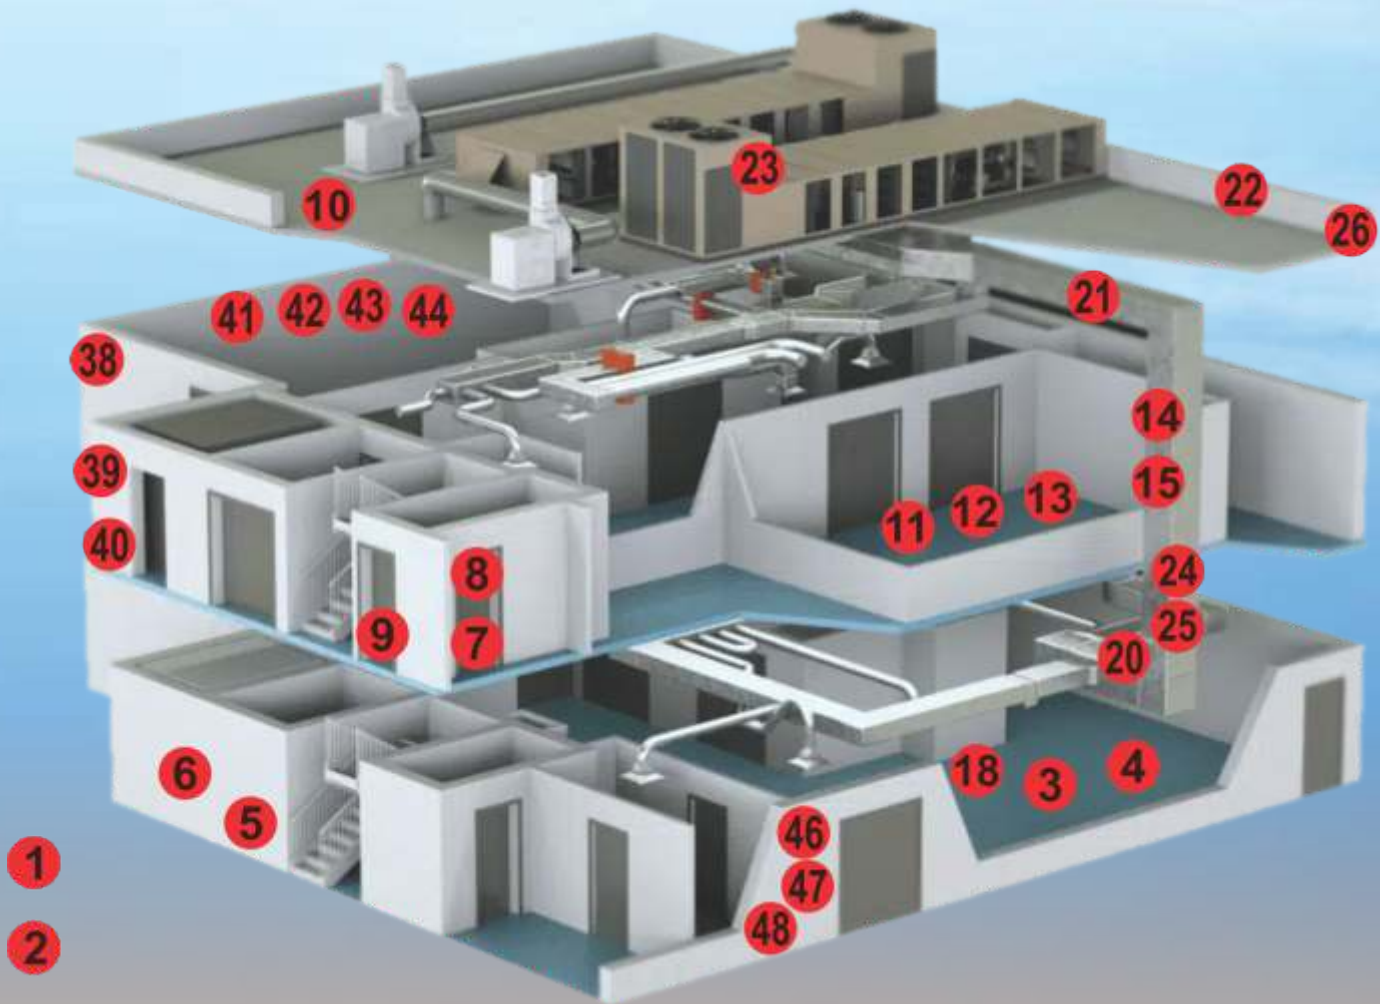

## WIDE RANGE SOLUTIONS OF CONSTRUCTION

### Concrete Admixture :

1. Fix N Fit PC-90 Concrete Admixture (Pce Base).
2. Fix N Fit NF-89 Concrete Admixture (Naptha Base).

### Floor Hardner :

3. Scot Ultra Lusty Floor Hard-N (Non Metallic Floor Hardening Compounds).
4. Scot Ultra Lusty Floor Hard-M (Metallic Floor Hardening Compounds).

### Building Finishing Construction Products :

5. Smart Bond-AAC Block Jointing Adhesive.
6. Scot Magic Plaster Ready Mixed self Curing Plaster Mortar.

### Water Proofing :

7. Scot WP-12 Ready to Use Water Repellent for New Construction.
8. Scot 100 Smart Seal Normal Water Proofing Compound.
9. Scot 100E Smart Seal Heavy Duty Water Proofing Compound.
10. Scot 101 Smart Coat Heat Resistant Water Proofing Coating System.

### Tiles and Stone Adhesives, Grout :

11. Scot Ultra Lusty F-119 (Grey) Small size Internal Floor Tiles Adhesive.
12. Scot Ultra Lusty F-120 (Grey) Regular Size Internal Wall and Floor Tiles Adhesive.
13. Scot Ultra Lusty W-121(Grey) and (white) Medium size Internal Wall and Floor Tiles Adhesive.
14. Scot Ultra Lusty W-122 (Grey) and XS-305 (white) External and Internal Tiles and Stones Adhesive.
15. Scot Ultra Lusty W-122 Plus (Grey) and XS-305 Plus (white) External and Internal Tiles and Stones Adhesive.
16. Scot Fix N Fit P-102 Admixture.
17. Scot Fix N Fit P-96 Admixture (Bonding Agents for Plaster, Concrete, & Gypsum).
18. Scot Fixer (Cement Polymer Grout).
19. Scot GP Fixer-2 (General Purpose Grout).
20. Scot EPO Grout (2 Component Epoxy Grout).

### Tiles and Stone Care Chemicals :

21. Scot WP-1 (Water Repellent Sealer for Natural Stone).

22. Scot WP-2 Acrylic Sealer (Stone)-Water Base.
  23. Scot WP-8 Wet Look Repellent Sealer (Stone)-Solvent Base.
  24. Scot WP-10 Water Repellent Sealer (Stone)-Water Base.
  25. Scot WP-11 Stain Repellent Sealer (Stone)-Solvent Base.
  26. Scot Shine Coat-Solvent Based Heavy Duty Acrylic Sealer.
  27. Scot Stone Epoxy-Clear Penetrating Two Component Epoxy Mastic.
  28. Scot EPO Mastice-Transparent Two Component Epoxy Mastic.
  29. Scot Mastic Coloured-Two Component Mastic.
  30. Scot Mastic Clear-Two Component Mastic.
  31. Scot EPO Fixer-Two Component Spot Bonding Adhesive.
  32. Scot Tiles Cleaner.
  33. Scot Stone Cleaner.
  34. Scot Cement Remover.
  35. Scot Shine It-Stone & Tile Floor Polish.
  36. Scot Flash-Optimum Stone Polish.
  37. Scot Polex O-Marble Polisher Powder.
- ### Putty, Primer & Paints :
38. Scot Wall Pro-Polymer Base Wall Putty.
  39. Scot Acrylic Putty-Acrylic Polymer Base Putty for Interior Walls.
  40. Scot Primer for Interior Walls & Exterior Walls.
  41. Scot Hi-shine Acrylic Washable Distemper.
  42. Scot Intpro Interior Emulsion Paint.
  43. Scot Intpro Shine Interior Emulsion Paint.
  44. Scot Feather-Premium Interior Shinning Paint.
  45. Scot Wall Texture Paint-Scratch Plaster/Roller/Texture Paint.
  46. Scot Shield Exterior Emulsion Paint.
  47. Scot Guard-Premium Exterior Emulsion Paint.
  48. Scot Guard Plus-Hi Sheen, Dust Resistant, Waterproofing Premium Exterior Emulsion Paint.
  49. Crack-O-Fill (Crack Sealer)

### FIX n FIT NF-89 Concrete Admixture (Naptha Base) :

FIX n FIT NF-89 is a naptha based modified super plasticizer designed for the production of wide range of concrete mixes from conventional to self-consolidating concrete. It shows improved performance in fluidity retention and the development of compressive strength. it combines the properties of water reduction and work ability retention. It allows the production of high performance concrete with good work ability. it is used in RCC columns, beams, basements, roof slabs and screeds, water tanks and water retaining structures, external Plastering.

#### BENEFITS :

- Increases early and ultimate compressive strength with normal setting
- Produces concrete with high levels of work ability without segregation
- Excellent concrete durability and rheology
- Lower permeability
- Excellent handling properties
- Lowers drying shrinkage and creep
- Increased productivity, resulting in reduced labour costs.



PACKAGING UNITS : 250ltr, 220ltr, 20ltr, 5ltr, 1ltr, 500ml

### FIX N FIT PC-90 Concrete Admixture (PCE Base) :

FIX n FIT PC-90 is a PCE based modified super plasticizer designed for the production of wide range of concrete mixes from conventional to self consolidating concrete. It shows improved performance in fluidity retention and the development of compressive strength. it combines the properties of water reduction and work ability retention. It allows the production of high performance concrete with good work ability. It is used in Cement Bricks, Paver Blocks, Cloumn & Beams, RCC Roads, Flyover, RCC Roads, Concrete repairs etc. design wise with recommend dosage 0.5 -1.5 % of the weight of cement or cementious materials. But go for trial mix for finalizing the dosages.

#### BENEFITS :

- Water reducing
- Reduces shrinkage, Lower permeability.
- Improve strength without increasing cement content
- Increases workability.
- Reduces w/c ratio up to 15 to 20 %
- Minimize casting time.
- Better compaction and finishing.
- Admixtures for concrete pre-casting.
- Compatible with all types of OPC / OPC + Fly Ash / PPC / PSC / GGBS and with other cementious materials.



PACKAGING UNITS : 250ltr, 220ltr, 20ltr, 5ltr, 1ltr, 500ml

### Scot Ultra Lusty Floor Hard-N ( Non-Metallic Floor Hardening Compounds)

It is a cementitious premixed shake-on floor hardener based on specially selected and graded silica aggregate and is ready to use. It is evenly sprinkled on fresh concrete and floated to a smooth finish. It provides increased wear resistance to surface. The product provides a dense, non-porous surface which is extremely resistance to abrasion and prevents problems, such as shrinkage, cracking, etc.

#### BENEFITS :

- Suitable for use in all cases where floors are subjected to severe mechanical wear and there is a need to apply special hard wearing surface coverings, such as: Trucking lanes, Loading bays, Car parks, Workshops, Machine shops, Spillways, Ramps, Heavy traffic areas.



PACKAGING UNITS : 40Kg.

## Scot Ultra Lusty Floor Hard-M ( Metallic Floor Hardening Compounds)

It is a premium non-oxidizing and heavy-duty metallic floor hardener useful in various industries. It is most suitable to give abrasion resistance to plain cured concrete. It is an easy to mix product that minimizes porosity and reduces dusting of heavy-duty heavy-traffic floors.

### BENEFITS :

- It is highly impact resistant and increases the abrasion on concrete surfaces with its metallic additives. The product essentially increases resistance to oil and grease stains.
- highly useful where light reflective non-metallic floors are required, such as in: Airline hangars, Warehouse, Factory floors, Heavy duty commercial / industrial areas.



PACKAGING UNITS : 40Kg

## Smart Bond (AAC Block Jointing Adhesive) :

SMART BOND is a ready to use, blend of cement, graded sand, and polymers modified high strength thin joint mortar for permanent fixing of all types of lightweight blocks vertically and horizontally at internally and externally. The Thin-Joint system enables the structure of a building to be built faster and to a better quality, allowing follow on applications to start work much sooner, whilst retaining the flexibility of on-site construction.

### BENEFITS :

- High bond strength
- Thin layer application
- Self Curing
- Extended open - wet time
- Suitable for high rise structures
- Suitable for internal & external application.
- Mix effortlessly, apply swiftly.
- Save time and manpower effortlessly with making your tasks efficient and effective.

### Product Characteristics :

- Appearance : Grey Powder
- Water Required : 25%
- Coverage 40Kg Bag (by Notch Trowel with 4mmx4mm thickness) : 120-135 Sq.ft OR 11-13 Sq.mtr.



PACKAGING UNITS : 40Kg.

## Wonder Magic Plaster (Ready Mixed Self Curing Plaster Mortar) :

Wonder Magic Plaster is a Ready Mix, Sand-cement Based Polymer Modified High Quality Mortar for Plastering of All Types of Substrate Like AAC Blocks, CLO Blocks, Concrete Blocks, Hollow Blocks, Clay Bricks and Fly-ash Bricks. It Is Easy to Use and Binds Better to the Substrate. It Replaces the Conventional Method of Plastering.

Comparison With Conventional Method of Plastering		
Parameter	Scot Magic Plaster	Conventional Method
Application time	Fast application	Not possible
Quality	Consistent and uniform Quality due to automation process	Manual mixing process which is not possible to test every batch
Shrinkage cracks	Minimum shrinkage cracks	Significantly high shrinkage cracks
Handling & storing	Easy handling and storage	Difficult to keep stock of different material
Wastage	No wastage	High wastage
Efflorescence	Negligible	Observed in many cases
Sand	Graded	Not graded
Not Graded	Minimum	High due to non-gradation & bigger sand particle size

### Product Characteristics :

- Coverage 40 Kg Bag (by Notch Trowel with 4mmx4mm thickness) : 16-17 sq.ft @ 10-12mm thickness
- Water demand (W/W) : 17-19% as per weight (can vary on climatic conditions)



PACKAGING UNITS : 40Kg.

## Scot WP-12 (Ready to use Water Repellent for New Construction)

Scot WP-12 is composed of Siloxane and Silane polymers dispersed in high boiling point solvent. It is a ready to use penetrating breathable sealer for concrete, brickwork, rendered and plaster walls, cement painted surfaces, over dholpur stone, porous stone and mangalore tiles. It is applied with a conventional low pressure spray, brush or roller, in various passes wet on wet from bottom up taking care not to let the product run until saturation of the substrate is reached. Don't wait first coat to dry before applying the next coat.

### BENEFITS :

- Easy to apply by brush, low pressure spray or roller
- Does not change the appearance of exterior decorative coating
- Minimizes staining, efflorescence
- Reduces capillary water absorption
- Cost Effective
- Clear coating does not stain the treated surface.
- Reduces the growth of algae and fun



**INFORMATION :** • Do not dilute • Close the container lid properly after use.  
• Before applying over the natural stones sampling should be done on a small area to check its suitability.  
• Surface dry time : 20 - 25 minutes • Curing Time : 24 hrs. • Coverage / lit (depend on substrate) :  
Porous substrate : 45-55 Sq.ft. & Non or low Porous substrate : 55-70 Sq.ft.

**PACKAGING UNITS : 200ltr, 20ltr, 5ltr, 1ltr**

## Scot 100 Smart Seal (Water Proofing Compound)

Scot 100 Smart Seal is two component water proofing compound chemical using for application in waterproofing and repairs. It is used for repairs of spelled concrete such as floors, slabs & Interior waterproofing of toilets & bathrooms etc. It bonds strongly to old and new concrete & plaster. It uses as a Bond Coat, Waterproofing, crack repair and Renders Patching work, rebar coating etc.

### INFORMATION :

- Do not dilute.
- Close the container lid properly after use
- Clean the surface with wire brush or scrubber to remove hidden dirt, loose prticles. Laitance & dust.
- Cement and Scot 100 mixing Ratio = 2:1
- Coverage : 20-25 Sq.ft / lit for 2 coat at 1mm thickness



**PACKAGING UNITS : 200ltr, 20ltr, 4ltr, 1ltr**

## Scot 100E Smart Seal ( Heavy Duty Water Proofing Compound)

Scot 100 E is a Chemical modified waterproofing compound used for high performance application in waterproofing and repairs. It is used for repairs of spelled concrete such as floors, columns, beams, chhajjas, slabs & Exterior and Interior waterproofing of underground/overhead concrete tanks, Shower pans, stalls and tub surrounds, Spas & hot tubs, Swimming pools, fountains and water bodies, Industrial, commercial and residential bathrooms and laundries, Kitchens and food processing areas, Terraces and balconies over unoccupied spaces, Counter-tops and facades etc.

### INFORMATION :

- Do not dilute.
- Close the container lid properly after use
- Clean the surface with wire brush or scrubber to remove hidden dirt, loose prticles. Laitance & dust.
- Cement or scot screed & Scot 100E mixing Ratio=as a passivator coat 1:1, as a water proof coat 1.5:1, as bonding coat 1:1
- Coverage : 15-25 Sq.ft / lit for 2 coat at as per required thickness.



**PACKAGING UNITS : 200ltr, 20ltr, 4ltr, 1ltr**

## Scot 101 Smart Coat (Heatresistant Waterproofing Coating System)

Scot 101 Smart Coat is an acrylic co polymer and weather-resistant chemicals based elastomeric, waterproof and heat resistant heavy duty coating for roofs, floor, Bathroom, Kitchen, Water storage tank, AC & Cooler Ducts, Plastic Tank, Sheds (Tin, Asbestos, Plastic) and walls. It provides long-lasting protection against water leaks, seepage, and cracks, keeping your surface strong and looking good and you can also tint by different light colours pigment paste as per requirement.

### INFORMATION :


- Clean the surface with wire brush or scrubber to remove hidden dirt , loose prticles. Laitance, & dust.
- Bitumen based waterproofing treatments if existing, must be completely removed by mechanical scarification or by any other effective mechanical means.
- Scot 101 Smart coat is a 4-layer system with proper thickness with a fiber mesh between second & third coats offering a reliable water proofing and Heat resistant protective coating of the surface.



PACKAGING UNITS : 25Kg, 20kg, 10kg, 5kg, 1Kg

## WATERPROOFING SOLUTION :

**STEP-1 :** Cleaning your surface by wire brush, broom brush, broom, air blower etc. Hammering on surface for loose cementitious materials. Water spraying wash for proper dusting and cleaning. Find out the cracks and opening it in v shapes with grinder and clean it with wire brush / broom brush.

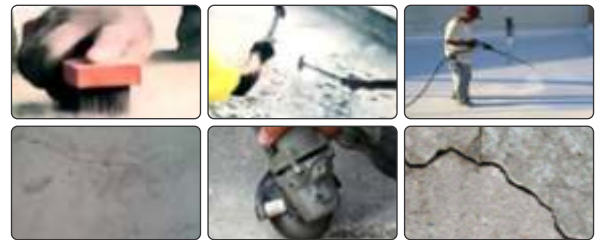


**STEP-2 :** Fill all cracks with Scot 100/Scot 100E smart seal and Grey cement or Scot Screed with 1 : 3 ratio.

**STEP-3 :** Apply priming coat by spray/brush/roller with Scot WP-12 and after 24 hrs. check the surface to absorb any kind of water by water spraying . if found water absorption at any portion of that surface, apply Scot WP-12 immediately.



**STEP-4 :** After priming coat apply 1st coat of the mixture of Scot 100/Scot 100E smart seal and Grey cement or Scot Screed by 1 :1.5 ratio by brush or roller.

**STEP-5 :** Before apply 2nd coat use fiber mash and cover the whole surface properly and apply the mixture of Scot 100/Scot 100E smart seal and grey cement or scot screed by 1 : 1.5 ratio by brush or roller.

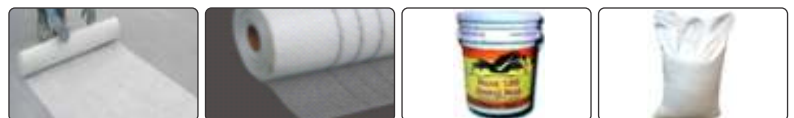

**STEP-6 :** Apply 3rd coat of the mixture of Scot 100/Scot 100E smart seal and Grey Cement or Scot Screed by 1:1.5 ratio by brush or roller.

**STEP-7 :** Apply 4th coat of the mixture of Scot 100/Scot 100E smart seal and Grey cement or Scot Screed by 1 : 1.5 ratio by brush or roller.

- For tilling or stone work spray sand at the time of wet surface for gripping.
- For terrace or cementitious exterior surface use scot 101 smart coat (heat resistant waterproofing coating system) at least 2 coat.



### Scot Ultra Lusty F-119 (Grey) Small Size Internal Floor Tiles Adhesive

Ultra Lusty F-119 is Ready Mixed Normal Grade Cementitious Tile Adhesive Composed of a Blend of Portland Cement, Special Polymers and Well Graded sand that when Mixed with Water Produces an Easily Workable Tile Adhesive Suitable for Bonding all Kind of Small Ceramic Tiles on Interior Floors.

**INFORMATION :**

- Mixing properly 4.5 -5 litres of clean fresh water for each 20 kg bag.
- Do not use for large format or heavy tiles, tile over tile applications.
- Coverage : 55-60 Sq.Ft. @3mm bed thickness by Notch Trowel
- Pot life : 2hrs.



**PACKAGING UNITS : 20kg**

### Scot Ultra Lusty F-120 (Grey) Regular size Internal Wall & Floor Tiles Adhesive

Ultra Lusty F-120 is a Polymer Added Cement Based Tile Adhesive. It Gives Excellent Bond on Cementitious Surfaces Like Concrete and Plaster. It Is Specially Designed for Application for Regular size Ceramics and Vitrified Tiles (internal Wall & Floor Surfaces). When Properly Applied, It Takes Care of The Problem of Hollowness.

**INFORMATION :**

- Mixing properly 4.5 -5 litres of clean fresh water for each 20 kg bag.
- Do not use for large format or heavy Wall tiles
- Coverage : 60-65 Sq. Ft. @3mm bed thickness by Notch Trowel
- Pot life : 2hrs.



**PACKAGING UNITS : 20Kg.**

### Ultra Lusty W-121(Grey) & (White) Medium size Internal Wall & Floor Tiles Adhesive

Ultra Lusty W-121 is a Polymer Integrated Grey Cement and White Cement Based Tile Adhesive. It is Specially Designed for Application for Normal size Ceramics and Vitrified Tiles (internal Wall & Floor Surfaces) Up To 4 Sq. Ft.

**INFORMATION :**

- Mixing properly 4.5-5 litres of clean fresh water for each 20 kg bag.
- Coverage : 60-65 Sq.Ft. @ 3mm bed thickness by Notch Trowel
- Pot life : 2hrs.
- Use Medium format or heavy tiles up to 4 Sq.ft, tile over tile applications.
- For fixing natural stone, mix with Scot Fix-102 admixture (20:1).



**PACKAGING UNITS : 20Kg.**

## Ultra Lusty W-122 (Grey) & XS-305 (white) External & Internal Tiles & Stones Adhesive

Ultra Lusty W-122 (Grey Cement-Based) and XS-305 (White Cement Based) Polymer-integrated Adhesive Designed for both Internal and External Applications, Catering Specifically to Vitrified Tiles, Natural Stones and Glass Mosaics in Dry and Wet Areas, on Both Vertical and Horizontal Surfaces.

### INFORMATION :

- Mixing properly 5 -5.5 litres of clean fresh water for each 20 kg bag.
- Coverage : 60-65 Sq.Ft. @3mm bed thickness by Notch Trowel
- Pot life : Above 2hrs.
- Use Large format or heavy tiles, tile over tile, Natural Stones applications.
- Non Sagging



PACKAGING UNITS : 20kg

## Ultra Lusty W-122 Plus (Grey) & XS-305 Plus (White) External & Internal Tiles & Stones Adhesive

Ultra Lusty W-122 (Grey Cement-Based) and XS-305 (White Cement Based) are a Premium Water-Resistant, High Performance Polymer Modified Cementitious Stone Adhesive, Specially Formulated for Fixing Vitrified Tiles, Specially Large size Granite and other Natural Stones on Exterior Surfaces. It Can Be Used for Cladding of Tiles and Stones on External Building Surfaces.

### INFORMATION :

- Mixing properly 5 -5.5 litres of clean fresh water for each 20 kg bag.
- Coverage : 60-65 Sq. Ft. @6mm bed thickness by Notch Trowel
- Pot life : Above 2hrs.
- Specifically designed for exterior wall of all types of ceramic tiles, vitrified tiles, semi vitreous tiles, marble, granite & natural stone etc.
- Suitable for wet wall areas
- Ideal for high rise buildings.



PACKAGING UNITS : 20Kg.

## Scot Fix N Fit P-102 Admixture

Fix N Fit P-102 is a Polymer Based Liquid Admixture Specially Formulated to Provide Strong and Super flexible Bond for Tiling and Stoning (except Metal Tile) on Deformable Substrate Like Drywall, Plywood, Fiber Cement Sheets. Mixing Gently 1Lt Fix N Fit P-102 and 20Kg Ultra Lusty Adhesive Powder With Required Water (4.5-5.5Lit Approx) for Suitable Performance. Also Used in Cementious Grout for Improving Flexibility, strength, water Resistance, abrasion Resistance and Compressive Strength.

### INFORMATION :

- Pour Adhesive powder into the bucket containing FIX n FIT P-102 and water, be careful to mix all three parts uniformly until a smooth, even colored paste is obtained.
- Suitable substrate : plywood, gypsum board, Fiber cement sheet, Tile baker board, wooden substrate, ceramic tiles, vitrified tiles, cladding / walls, swimming pool tiles, stones etc.



PACKAGING UNITS : 1ltr, 200ml.

### Scot Fix N Fit P-96 Admixture (Bonding Agents for Plaster, Concrete and Gypsum)

FIX n FIT P-96 is a polymer based liquid admixture specially formulated as a bonding agent between concrete and plaster, new and old concrete, gypsum-based applications, such as gypsum plasters or gypsum boards, concrete and ceramic/glazed tiles etc.

**INFORMATION :**

- Close the container lid properly after use.
- Green in colour, easy to identify on the applied surfaces
- Strong chemical and mechanical bond
- Dries within 24 hours and allows
- Increases tensile and flexural strength
- Non-ionic ; hence, no possibility of an attack on concrete by ions like chlorides, alkali sulphates, etc.



PACKAGING UNITS : 200ltr., 20ltr., 5ltr., 1ltr., 500ml

### Scot Fixer (Cement Polymer Grout)

FIXER Cement Polymer Grout is made of cement, fine graded filler, chemical additives including powder polymers and various colour-fast pigments. Fixer is designed for joint width upto 1-4 mm maximum. It is suitable for grouting ceramics tiles, vitrified tiles, glass mosaics, marble, granite and natural stone.

**INFORMATION :**

- This non-shrink, color fast and sag resistant tile grout is the perfect solution for both external and internal application.
- Mix properly Fixer Grout and water 3:1 ratio in a clean bucket.



PACKAGING UNITS : 1Kg.

### Scot GP Fixer-2 (General Purpose Grout)

GP Fixer-2 Grout is a High-strength, Non-shrink, Cementitious Grout Made from a Blend of Portland Cement, Graded Fillers, and additives that Ensure Controlled Expansion and Minimize Water Demand. Its Crack-resistant Formula is Self-compacting and Flowable, Providing Excellent Contact With Load-Bearing areas while Preventing Bleeding and Segregation. Ready to Use with just Water, It's Perfect for Core and Bore Packing, Filling Gaps Between Concrete Members, Masonry Cavities, Anchor Bolts, and Foundation Grouting.

**INFORMATION :**

- Mixing Ratio : Pourable- 5 To 5.5 Ltr Water Per 40kg GP Fixer-2 & Flowable-6 to 6.5Ltr Water per 40kg GP Fixer-2.
- Layer Thickness 100 mm Maximum.
- Uses to Grout Bearings, Machine Foundations, Columns Joints in Precast Construction, anchors in Concrete, Cavities, Gaps and Voids in Concrete, Base Plate of Turbine, Compressor, Boilers, Pumps and Heavy Machinery Etc.



PACKAGING UNITS : 40Kg.

## Scot EPO Grout (2 Component Epoxy Grout)

EPO Grout is an Epoxy Grout Specially Designed for use Indoor and Outdoor Grouting Application of Ceramic, Vitrified Tiles and Stone Where Staining, Toughness, chemical and Mechanical Resistance Properties and Bacteria free is Expected. it is a 2-component, Epoxy-based Tile Grout Specially Designed for Quick Grouting of Joints Up to 10 Mm.

### INFORMATION :

- Dry & Wet areas like Bathroom, Kitchen, High Traffic Areas, and Swimming Pools in Residential & Commercial areas including industries, hotels, Chemical plants, Dairies / Food / Drinks Processing plants & shopping malls.
- Mixing ratio : Color Resin Paste 900 gm + Hardener 100gm (9:1)



PACKAGING UNITS : 1Kg., 5Kg.


## Scot WP-1 (Water Repellent Sealer for Natural Stone)

Scot WP-1 is water based Clear, colorless penetrating sealer for porous & non-porous natural stone. Dilute WP-1 in Ratio of 1:7 with filtered water TDS less than 200. It is applied with a conventional low pressure spray, brush or roller, in various passes wet on wet from bottom up taking care not to let the product run until saturation of the substrate is reached. Don't wait first coat to dry before applying the next coat. A full cure is achieved after 24-72 hours. Foot traffic may begin in 6-8 hours.

### INFORMATION :

- Easy to apply by brush, low pressure spray or roller
- Apply coat on wet surface two coat as needed for porous, absorbent surfaces. Apply 30-40 minutes after first coating as directed in step 3.
- Remove excess sealer by wiping surface thoroughly with clean, dry white towels.
- Does not change the appearance of exterior decorative coating
- Minimizes staining, efflorescence
- Reduces capillary water absorption
- Cost Effective
- Clear coating does not stain the treated surface.
- Reduces the growth of algae and fungus.

PACKAGING UNITS : 1ltr.

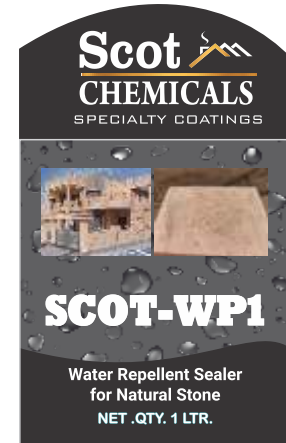

## Scot WP-2 Acrylic Sealer (Stone)-Water Base

Scot WP-2 is an acrylic polymer base sealer which enters the micro pores and decreases the porosity and protects the stone surface for longer life with given a wet look surface of the natural color of the natural stone, sand stone, cemented tiles and wooden floors.

### INFORMATION :

- Do not dilute.
- Close the container lid properly after use
- Clean the surface properly
- Apply by brush, spraygun, roller, sponge etc.




PACKAGING UNITS : 20ltr, 5ltr, 1ltr

## Scot WP-8 Wet Look Repellent Sealer (Stone)-Solvent Base

Scot WP-8 is a Permanent, solvent-borne transparent sealer for giving wet or glossy look on stones. It is a highly water-repellent & weather-resistant sealer.

### INFORMATION :

- Clean the surface makes and sure it's free from any foreign particles and moisture.
- Make sure area is well ventilated and dust do not settle while application coat.
- Shake the container well for one minute before opening the container for use.
- Do not dilute or mix with other products.
- Multiple applications may be required for some stones. In case of multiple applications, allow 6 to 12 hours gap between the applications.
- Give curing time of 36 Hr.
- After usage, close the container well sealed to avoid contamination and solvent loss and store in cool place away from heat and fire.

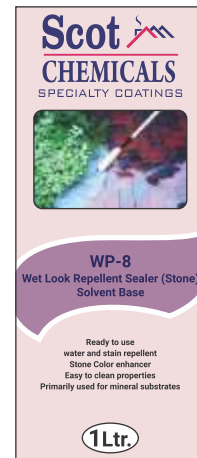


PACKAGING UNITS : 1ltr

## Scot WP-10 Water Repellent Sealer (Stone)-Water Base

Scot WP-10 is an excellent impregnating agent for many mineral backgrounds, eg. Bricks, clinker, chalky sandstone, natural stone or mineral plaster. Dilute WP-10 in Ratio of 1:7 with filtered water TDS less than 200. It is applied with a conventional low pressure spray, brush or roller, in various passes wet on wet from bottom up taking care not to let the product run until saturation of the substrate is reached.

### INFORMATION :

- Easy to apply by brush, low pressure spray or roller
- Apply coat on wet surface two coat as needed for porous, absorbent surfaces. Apply 30-40 minutes after first coating as directed in step 3.
- It provides good adhesion for paints and does not change the appearance of exterior decorative coating
- Minimizes staining, efflorescence
- Reduces capillary water absorption
- Cost Effective
- Reduces the growth of algae and fungus

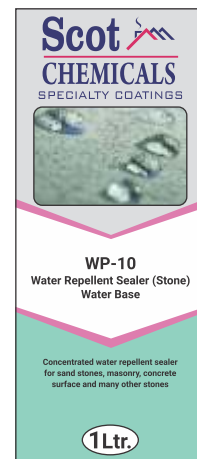


PACKAGING UNITS : 1ltr.

## Scot WP-11 Stain Repellent Sealer (Stone)-Solvent Base

Scot WP-11 is a ready to use solvent-based stain repellent sealer that gives unmatched protection against oil and water based stains on natural and composite stones. It also provides excellent water and dirt repellency. It allows moisture vapor transmission and is UV-resistant.

### INFORMATION :

- Clean the surface makes and sure it's free from any foreign particles and moisture.
- Make sure area is well ventilated and dust do not settle while application coat.
- Shake the container well for one minute before opening the container for use.
- Do not dilute or mix with other products.
- To ensure deep penetration apply 2 to 3 coats.
- Repellency begins after a few minutes but the product is fully cured after 24 hours.
- Allow ventilation for 2 to 3 days in food areas.
- After usage, close the container well sealed to avoid contamination and solvent loss and store in cool place away from heat and fire.

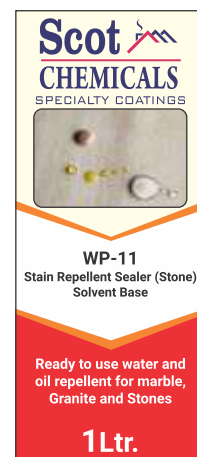

PACKAGING UNITS : 1ltr

## Scot SHINE COAT - Solvent Based Heavy Duty Acrylic Sealer

Scot SHINE COAT is a transparent ready to use solvent-based hard heat resistant and durable advanced penetrating low gloss wet look sealer for natural stone such as marble, granite, lime stone, slate, sand stone etc. It is designed to darken and enhance concrete and paver surfaces also.

### INFORMATION :

- Clean the surface makes and sure it's free from any foreign particles and moisture.
- Make sure area is well ventilated and dust do not settle while application coat.
- Shake the container well for one minute before opening the container for use.
- Do not dilute or mix with other products.
- To ensure deep penetration apply 2 to 3 coats.
- Repellency begins after a few minutes but the product is fully cured after 24-72 hours.
- After usage, close the container well sealed to avoid contamination and solvent loss and store in cool place away from heat and fire.



PACKAGING UNITS: 20ltr, 5ltr, 1ltr

## SCOT STONE EPOXY-Clear Penetrating Two Component Epoxy Mastic :

SCOT STONE EPOXY is a two component epoxy mastic use for marble, granite, agglomerates, marble resin, terrazzo, calcareous stones. Weatherproof and with a very high resistance to oils, greases, detergents, solvent and marine water.

### INFORMATION :

- The area to be glued or filled must be clean, perfectly dry and dust free.
- Don't use the coloring paste more than 2% in weight, it could prejudice the adhesion.
- Don't dilute, it is ready to use,
- Mixing ratio (Resin : Hardner)- 2:1,
- Studied for hard and crystalline stones where standard polyster mastic are not indicated.



PACKAGING UNITS: 5ltr. Set, 1ltr. Set

## SCOT EPO MASTICE-Transparent Two Component Epoxy Mastic :

EPO MASTICE is an epoxy-based transparent thixotropic mastic gel used for bonding, grouting, filling, and gluing joints of marble, stones, granite, tiles and quartz in exterior and interior areas with a minimum yellow appearance. It has high gloss and brightness which makes it appear soft and light.

### INFORMATION :

- Use in Stone and Masonry Bonding, Surface Repairs, Crack and Joint Filling, Anchoring and Setting, Tile Installation.
- Don't dilute, it is ready to use.
- Make sure that the surface is completely dry and clean before getting treated.
- Mixing ratio (Resin : Hardner)- 2:1
- It has 15-20min Gel time
- Working on Application area can be done 24 hours after application
- Close the containers after using the product and avoid long air exposer. This helps in maintaining the shelf-life of the product.



PACKAGING UNITS : 2.25Kg. Set

### SCOT MASTIC -Two Component Mastic :

SCOT MASTIC is a highly viscous thixotropic glue that is used to fix and fill stones, marbles, and Onix in vertical applications with properties of low shrinkage, excellent adhesion, excellent reactivity to colder as well as hotter temperatures with good shelf life.

#### INFORMATION :

- surface should be dust-free, dry, and clean before the application.
- Mixed properly Coloured Resin paste and Hardner (catalyst).
- Hardening time 3-7 min. @ 25°C
- Store Resin Paste & catalyst in a dark place away from sunlight.



PACKAGING UNITS : 1.5Kg Set

### SCOT MASTIC Clear-Two Component Mastic :

It is a clear viscous glue adhesive used for gluing and repairing the work of white marble joints and similar marble families such as Thassos and Carrara. The hardened product is easily polishable.

#### INFORMATION :

- Surface should be dust-free, dry, and clean before the application.
- Mixed properly Coloured Resin paste and Hardner (catalyst)
- Hardening time 3-7 min. @ 25°C
- Store Resin Paste and catalyst in a dark place away from sunlight



PACKAGING UNITS: 1Kg. Set

### SCOT EPO FIXER-Two Component Spot Bonding Adhesive :

SCOT EPO FIXER is an epoxy-based strong spot bonding adhesive that is used as a quick fixing solution for all types of tiles and stones such as composite, metal tile, and plywood. It is also used for overhead applications on different surfaces such as wood derivatives and drywall. This multi-purpose adhesive is usually used for small contact surfaces for interior and approved exterior applications.

#### INFORMATION :

- surface should be dust-free, dry, and clean before the application.
- Mixed properly Resin Part and Hardner Part.
- Setting time of 15-30 minutes.



PACKAGING UNITS : 1Kg Set

### SCOT Tiles Cleaner :

SCOT Tiles Cleaner formulated to tackle dirt, grime, and stains, this cleaner ensures thorough cleaning without harming the tile's natural finish.

**INFORMATION :**

- Safely removes dirt and stains.
- Suitable for all tiles types.



**PACKAGING UNITS : 1ltr.**

---

### SCOT Stone Cleaner :

SCOT Stone Cleaner formulated to clean the toughest grease and stains without harming the natural finish of the stone.

**INFORMATION :**

- Powerful degreasing action.
- Strips wax and finishes.
- Safe on various surfaces.



**PACKAGING UNITS : 1ltr.**

---

### SCOT Cement Remover :

SCOT Cement Remover clean stubborn cement and mortar residues from stone and tile surfaces without harming the natural finish.

**INFORMATION :**

- Quickly dissolves cement residue.
- Wet the surface thoroughly with water, use undiluted or dilute half with water and apply on the surface and wait for 15-20 minutes for the reaction to take place, if required scrub with a hard brush.
- Rinse the floor with water and use a wet vacuum to clean and dry the floor.
- Do not dilute or mix with any other product.
- To be used by trained professionals only.



**PACKAGING UNITS : 1ltr.**

### Scot SHINE IT-Stone & Tile Floor Polish :

Scot SHINE IT is a thixotropic high quality spirax waxes polish used in marble, natural stone, engineered stone to improve the appearance by enhancing the colour structure and provide protection.

#### INFORMATION :

- For the initial treatment of newly installed natural and engineered stone surfaces, window sills, table tops, etc. to improve the appearance and provide protection.
- Direction for use : Turn off under floor heating. Shake bottle before use. Thinly and evenly apply SHINE IT with a clean cloth and allow the products to dry. Then polish with a soft linen cloth or polishing pad. Highly absorbent surfaces may have to be treated more than once.
- The surface to be treated must be completely clean and dry. Do not apply in temperatures below 15°C. Protect surfaces sensitive to solvents. SHINE IT is suitable for indoor use only.



PACKAGING UNITS : 1Kg., 500gm

### Scot FLASH-Optimum Stone Polish :

Scot FLASH is a new age nano poly-waxcryn, which enters into the Micro Pores & increases deepness and grace protecting the stone surface for longer life.

#### INFORMATION :

- Take a piece of cotton cloth/jute/sponge, shake the liquid in the container and wet the cloth with Scot Flash. Apply on the polished surface of the stone. Let the applied surface dry up to 5 min, Buff the surface with buffing machine.




PACKAGING UNITS : 1ltr., 500ml.

### SCOT POLEX O-Marble Polisher Powder :

SCOT POLEX O powder is a professional-grade marble crystallizing agent that enhances shine and durability. It removes dullness, etching, and stains, leaving a glossy finish. Ideal for marble floors, countertops, and surfaces, it's easy to apply and maintain. It enhances shine on marble and other stones, ideal for floors. Cover adjoining fabric, plastic or parquet floors. Protect furniture from splashes. Use paste immediately after preparation. Wear gloves and rubber boots. Store the powder under dry conditions.

#### INFORMATION :

- Wet the surface, apply the SCOT POLEX O powder paste (powder : water= 1:2) on the surface.
- Buff the paste well into the stone with a single disc machine and red pad.
- Run the machine along any one side and then at right angle to it.
- As the paste begins to dry high gloss will appear on it.
- Spray small quantity of water if the powder dries up too fast.
- After the powder dries continue to buff with white pad to enhance the gloss & utilize the powder completely.
- Wash thoroughly after crystallization with SCOT Stone Cleaner and vacuum to dry.

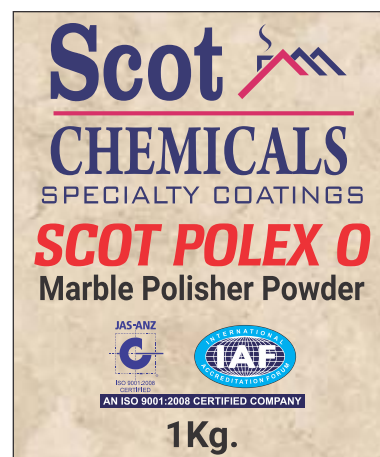

PACKAGING UNITS : 1Kg.

### Scot Wall Pro-Polymer Base Wall Putty :

Scot Wall Pro is a combination of white Portland cement, natural minerals, special additives, and polymers, it is developed to add strength, durability, and waterproof your interior and exterior walls for a longer life.

#### INFORMATION :

- New masonry surface must be allowed ( 28 days) to cure completely.
- Ensure the surface is completely free from all dirt, loosely held plaster, powdery residue, oil grease or any other contamination. Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.



PACKAGING UNITS : 40Kg, 20Kg Bag

### Scot Acrylic Putty-Acrylic Polymer Base Putty for Interior Walls :

It is a water thinnable putty, specially formulated for filling of dents, surface imperfections and levelling on primed wall/surfaces prior to application of topcoat. It can be used as a better alternative to Plaster of Paris (POP), as POP is highly porous, hygroscopic and develops patchiness & loss of sheen/gloss due to the absorption of binder part of the paint film.

#### INFORMATION :

- Sand the surface with sand paper no.180 to remove loose particles, paint, dust cracked & flaked paint and wipe clean.
- Smoothen the surface by filling dents with thin coats Scot Acrylic Putty by Trowel, Putty Knife/blade and allow drying for 4-6 hrs. Sand with sand Paper 180 and wipe clean. Apply another coat of primer. Sand the surface with sand paper 320 and wipe clean. Apply the topcoat.
- Acrylic putty comes in paste form of required workability. Hence, there is no need to dilute with water, but if required dilute them add plenty of water if required.
- When mixed to proper consistency, approx. 20-25sq. feet per kg. for upto 1.5 mm thickness in 2 coats.



PACKAGING UNITS : 20Kg Balti & Bag

### Scot Primer for Interior Walls & Exterior Walls :

A water-based wall coating based on acrylic co-polymer emulsions, ideal for use on both, exterior as well as interior surfaces. It can also be applied on a wide range of cement plasters, ceilings, asbestos sheets, concrete, etc as an undercoat.

#### INFORMATION :

- Sand the surface with sand paper no.180 to remove loose particles, paint, dust cracked & flaked paint and wipe clean.
- Smoothen the surface by filling dents with thin coats Putty by Trowel, Putty Knife/blade and allow drying for 4-6 hrs. sand with Sand Paper 180 and wipe clean. Apply at least 2 coat of primer (Primer : Clean water =1:1) with 3-5 hrs interval period and after that apply top coat of paints.
- Do not over dilute and add any type of stainer / colorant.
- Coverage 90-100 sqft. per lit per coat for smooth surface with no suction.



PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr.

### Scot Hi-Shine Acrylic Washable Distemper :

Hi Shine Distemper is smooth and state of the art technology for interior walls and surfaces in paste form. It is 100% water based product. It is also acrylic Co-polymer emulsion based distemper for interior walls & surfaces only. It is the best known for low cost, elegant, smooth, attractive, durable matt finish. It is specially formulated by using ultrafine minerals, biocides, and alkali resistant superior acrylic co-polymer. The unique processing technology of this product ensures smoothness & consistency. The special binder used in Hi-Shine Acrylic Washable Distemper imparts a strong adhesion to the wall surface thus increasing the life of the paint film.



PACKAGING UNITS : 20kg, 10kg, 5kg, 1kg.

### Scot Intro Interior Emulsion Paint :

Scot Intro Interior Emulsion is an economic plastic emulsion paint designed for application on interior walls. It is formulated from a time-tested co-polymer emulsion binder. Scot Intro Interior Emulsion offers excellent smoothness and elegance to your interior walls, giving it a rich look. It has good water & alkali resistance properties, which makes the paint last longer.

#### INFORMATION :

- New masonry surfaces must be allowed to cure completely. Recommended curing time is 28 days minimum. A base coat of Scot Primer before application of Scot Intro Interior Emulsion Paint is recommended for best performance. Surface must be clean and sound, free from all dust, oil, grease and other contaminations. Remove all loose material with scrapper or stiff wire brush. Dampness of the wall has to be treated with appropriate measures. For filling cracks upto 3mm, holes and dents use Scot Wall Pro Wall Putty. For interior surfaces or substrates that are subjected to continuous seepage or dampness, kindly get the repairs done before the application of paint.

PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr.



### Scot Intro Shine Interior Emulsion Paint :

Scot Intro Shine Interior Emulsion is a plastic emulsion low sheen paint designed for application on interior walls. It is formulated from a time-tested co-polymer emulsion binder. Scot Intro Shine Interior Emulsion offers excellent smoothness and elegance to your interior walls, giving it a rich look. It has good water and alkali resistance properties, which makes the paint last longer. **Application Stage** : 1 coat Interior Wall Primer - Solvent Thinnable , 2 Coat Acrylic Wall Putty, 1 Coat Interior Wall Primer - Solvent Thinnable , 2 Coat Scot Intro Shine Interior Emulsion Paint.



PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr.

### Feather-Premium Interior Shinning Paint :

Scot Feather Interior Emulsion is a plastic emulsion high sheen premium paint for application on your rich interior walls. It offers excellent smoothness, durability and elegance to your interior walls, giving it a rich look. It has good water and alkali resistance properties, which makes the paint last longer.

**Application Stage :** 1 Coat Interior Wall Primer - Solvent Thinnable , 2 Coat Acrylic Wall Putty, 1 Coat Interior Wall Primer - Solvent Thinnable , 2 Coat Feather premium interior Emulsion Paint.



PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr.

---

### Wall Texture Paint-Scratch Plaster/Roller/Fine Texture Paint :

Scot Wall Texture Paint contains acrylic copolymers and reinforced with high quality marble powder ,silica sand and its dust, aggregates. It adheres flawlessly to a variety of interior and exterior wall surfaces, withstanding extreme weather conditions like humidity, rain and hot climatic. It contains anti bacterial and anti fungal additives. So you can let your imagination flow with a range of textures. It adheres perfectly to different external & internal surfaces, like plaster, masonry, brickwork, concrete, gypsum & asbestos. It is also reviving old surfaces.



PACKAGING UNITS: 25Kg. Bag

---

### Shield Exterior Emulsion Paint :

The most economical choice of acrylic emulsion paints, Scot Shield combines aspects of aesthetics and decoration with great protection. It does not peel-off or crack, contains special biocides which protect the paint film against algae and fungi, high color retention can be used as self priming coat at 100% dilution, contains special acrylic emulsion binder, quick drying, curing is not required.



PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr

## Guard-Premium Exterior Emulsion Paint :

Guard Exterior emulsion paint is a convenient choice for users of acrylic emulsion paint, which provides protection with decoratio. Guard can be used for interiors also. It provides quality with economy, fade resistant, contains special biocides which protect the paint film against algae and fungi, superior spreadability. Good resistance to ultravioletradiation, provides good alkali resistance forms film which is permeable to vapour/air and impermeable to rainwater, durable protection.



PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr

## Guard Plus-Hi Sheen, Dust Resistant, Waterproofing Premium Exterior Emulsion Paint :

Guard Plus is a Hi sheen, Dust resistant, waterproofing exterior premium quality paint especially formulated for superior performance on exterior walls due to its unique water resistant properties against fungi, algae and dampness caused by lashing rain. Guard Plus paint has anti-carbonation property (added structural protection—which does not allow carbon dioxide & chloride ions to penetrate into the structure) when applied as a system i.e. Scot Wall Primer as a base coat and Guard Plus premium paint as top coat.



PACKAGING UNITS : 20ltr, 10ltr, 5ltr, 1ltr

# Crack O Fill

The areas of application for Crack "O" Fill are:

- 1) Cracks on all interior and exterior absorbent surfaces.
- 2) Suitable for plaster cracks of up to 5 mm width.
- 3) Cracks and gap caused by drying and shrinkage.

**Precautions :** Do not apply on cracks that are wider than 3 mm. · Do not apply on wet surfaces.

· Crack "o" Fill for plaster cracks. Do not apply on structural or joint cracks.

**Areas of application :** Cracks on interior / exterior absorbant surfaces · Cracks and gaps caused by drying and shrinkage

**Benefits :** **Crack Filling Ability :** Strong filling capacity for cracks of up to 5 mm width. **Flexibility :** High elongation film that accommodates movement. **Mechanical Strength :** Reinforced with glass fibers for superior mechanical strength. **Waterproofing :** Water resistant film stops water ingress through cracks. **Adhesion :** Very strong adhesion on all absorbent surfaces like plaster, wood, gypsum, POP, asbestos, etc. **Usage :** Single pack and easy to apply. **Over Coating :** Easily over coated by emulsion paints .

**CLEANING :** Open the cracks and widen the cracks to form a "V" shaped groove. This will provide a strong base for adhesion of Crack Seal to the substrate. Clean the area thoroughly to free it from dust and loose particles. It is recommended to use a cutter for opening the cracks.

**PRIMING :** Post cleaning apply Primer in the opened cracks. For interior and exterior cracks, use SCOT 100 polymer compound for better adhesion.

**Technical Information :** **Form-** Ready to use paste, **Density -** at 25°C- 1.28, **Drying Time-** Minimum 6 hours depending on temperature and humidity, **Flash Point-** Crack Seal is a water based which is not flammable Consumption- 75 - 80 running feet / kg / 2 coats (3mm wide and 5mm deep), **Shelf life -** 1 year

### SAFETY FEATURES :-

· Store the container with the lid tightly closed in an upright position, in a cool, dry place · Keep out of reach of children and away from eatables. May be harmful if swallowed. In case of ingestion seek immediate medical attention. · Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. · In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists. · Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation. · Do not pour leftover paint down the drain or in water courses. · In the event of spills, contain spillage using sand or earth. · No added Lead, Mercury or Chromium compound





## List of Prestigious Clients :

1. L&T
2. CPWD
3. Rajasthan Housing Board
4. NKC Projects Pvt. Ltd.
5. Global Build Estate Projects Pvt. Ltd.
6. Ishaan Clubs & Hotels
7. RK-Techo
8. BRPL Ltd.
9. Hayatt Hotels
10. Gwalior Stone
11. KR Hi-tech Construction Pvt. Ltd.
12. Aakriti Developers
13. Floor Care Concept
14. Swastik Tiles Pvt Ltd.,
15. Sdn Real State Solution
16. Swastik Homes
17. Manoharma Hight Pvt. Ltd.
18. Aakar Associates
19. Vardhman Associates
20. R-tech
21. S.Nand Kumar and Company
22. UDB Builder
23. Apex College
24. Tech-Wheel
25. Aashish Group
- 26.
- 27.
- 28.
- 29.
- 30.

**Scot**   
**CHEMICALS**

SPECIALTY COATINGS™  
[www.scotchemicals.in](http://www.scotchemicals.in)

**100 %**  
**NATURAL WHITE**  
**BRISTLE**

**PROFESSIONAL**  
**PAINTING**  
**TOOLS**

**PROVIDE AN ULTRA**  
**SMOOTH FINISH**

**DESIGNED FOR**  
**WATER BASED PAINTS**  
**OIL BASED PAINTS**  
**STAINS AND CLEANS**

**QUALITY**

**A-1**

**Z-11**

**HIGH**  
**QUALITY**

**SIZE**

**3"**

**4"**

**5"**

**6"**

**ARTIST FLAT SHORT BRUSH ALSO AVAILABLE**  
**(NO. 0 TO 16)**



**HOSPITALS**



**RAILWAY STATIONS**



**AIRPORTS**



**SWIMMING POOL**



**BUS STAND**



**COMMERCIAL BUILDINGS**



**RESIDENTIAL BUILDINGS**

**Admin Off. : 377B, First Floor, JSS Road, Chira Bazar, Mumbai-400002**

**Office : D-133, Jan Path, Shyam Nagar, New Sanganer Road, Jaipur-19**

**Office No. : 01412297251**

**Customer Care No. : +91-9829022556**

**E-mail : [scotchemical@gmail.com](mailto:scotchemical@gmail.com) | Website : [www.wallproindia.in](http://www.wallproindia.in)**